

D01 gG 2A/400V



COM_ETISTORE_IDENT_SPECIFICATIONS

ETI Code	002211001
Description	D01 gG 2A/400V
Class name	Fuse link
Rated current (A)	2
Type	D0
Size	D01
Characteristics	gG
Rated AC voltage (V)	400
Rated DC voltage (V)	250
Dimensions	E14
Indicator	Top fuse status indicator
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Standards	DIN EN 60269-1, DIN EN 60269-3
Application	For cable protection
Application	For cable protection
Indicator	Top fuse status indicator
Dimensions	E14
Breaking capacity DC (kA)	8
Breaking capacity AC (kA)	50
Standards	DIN EN 60269-1, DIN EN 60269-3

Online product page

Other documentation



COM_ETISTORE_DOCTYPE_Instruction

COM_ETISTORE_DOCTYPE_TD

COM_ETISTORE_DOCTYPE_declaration




ETIM international classification

Application	For cable protection
Breaking capacity	50
Colour code	Pink
Construction size	D01
Max. rated operation voltage Ue AC	400
Nominal rated current	2
Nominal rated voltage	400


COM_ETISTORE_CutOff

Cut-off current characteristics

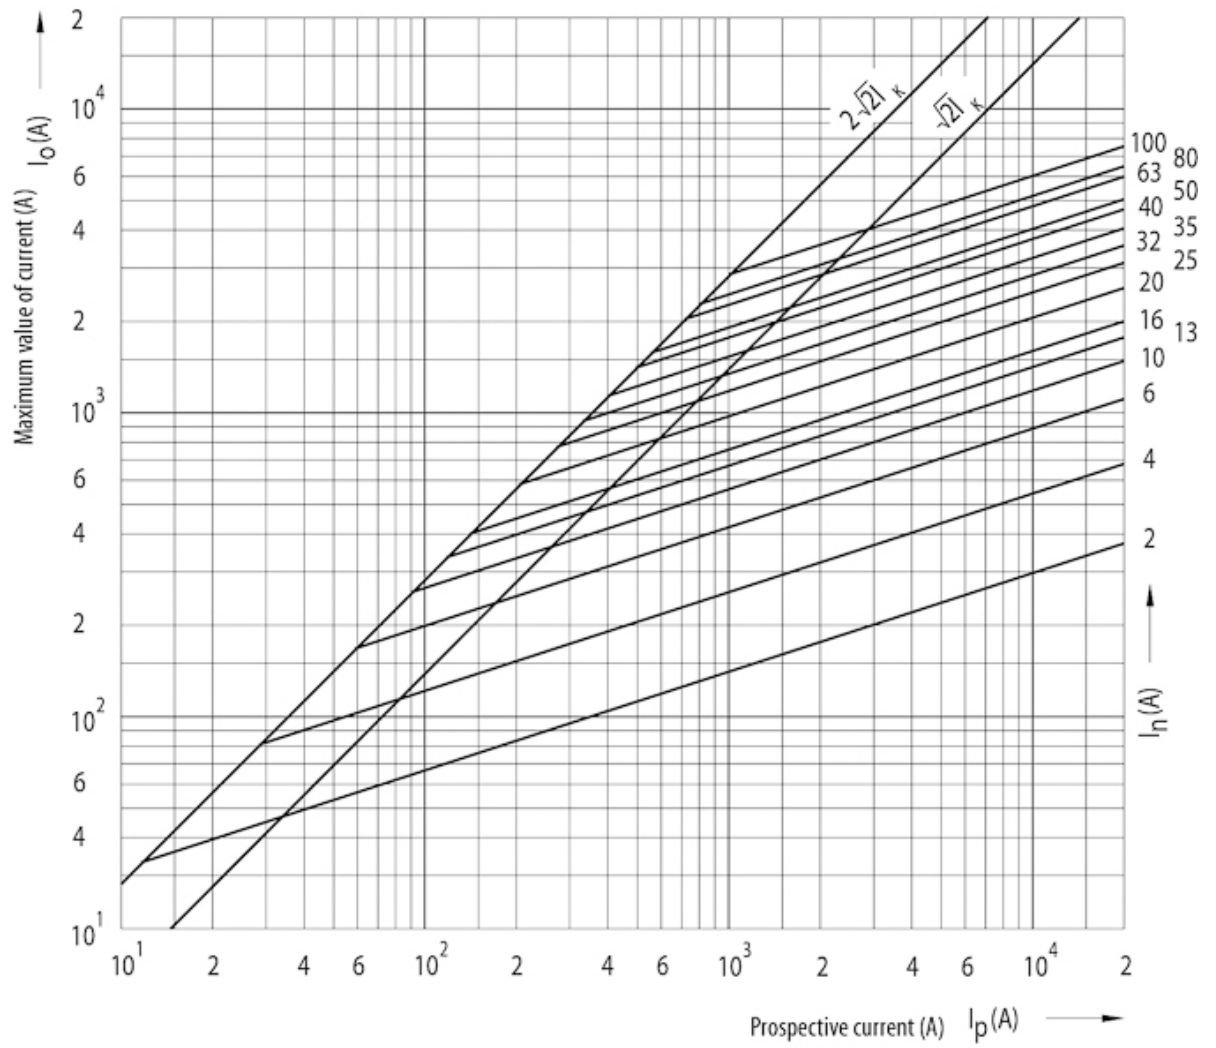


COM_ETISTORE_EnergyCharacteristic


Melting energy characteristics I^2t

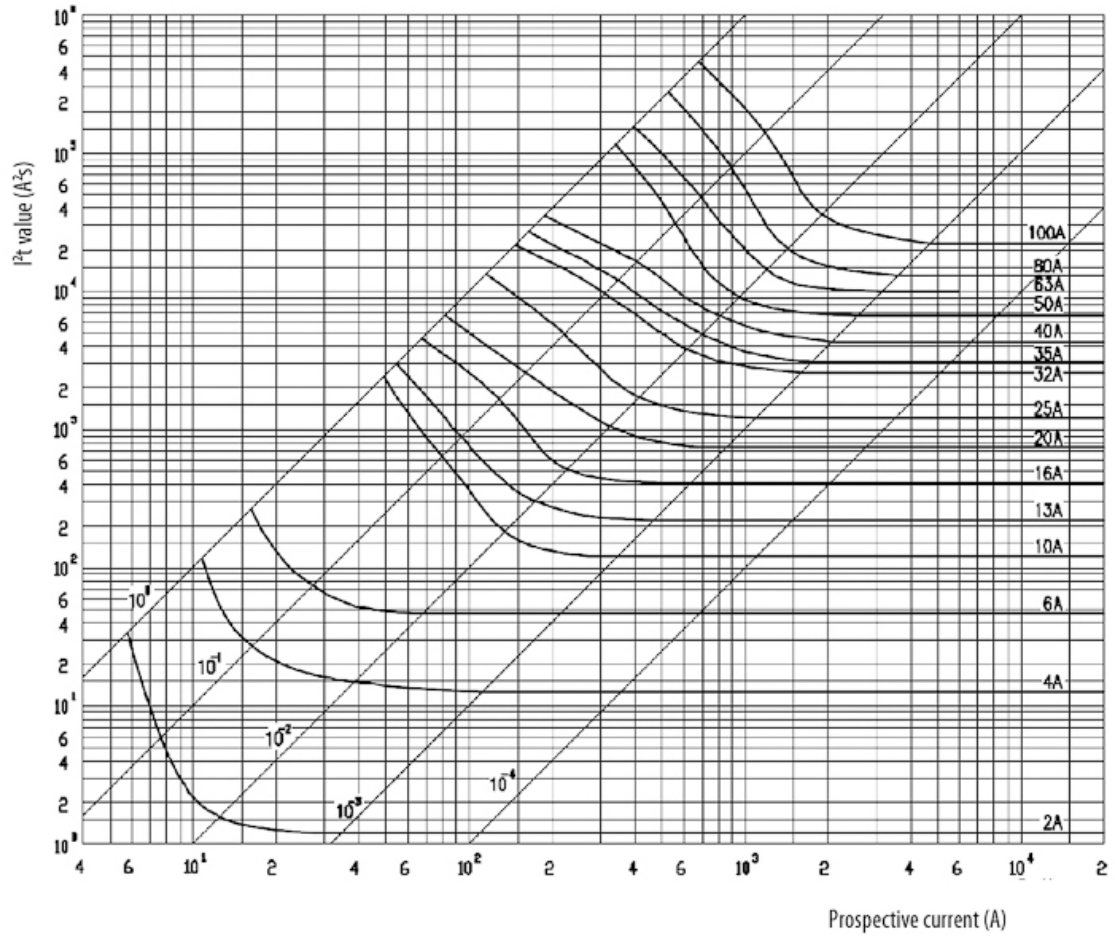

COM_ETISTORE_ItCharacteristic

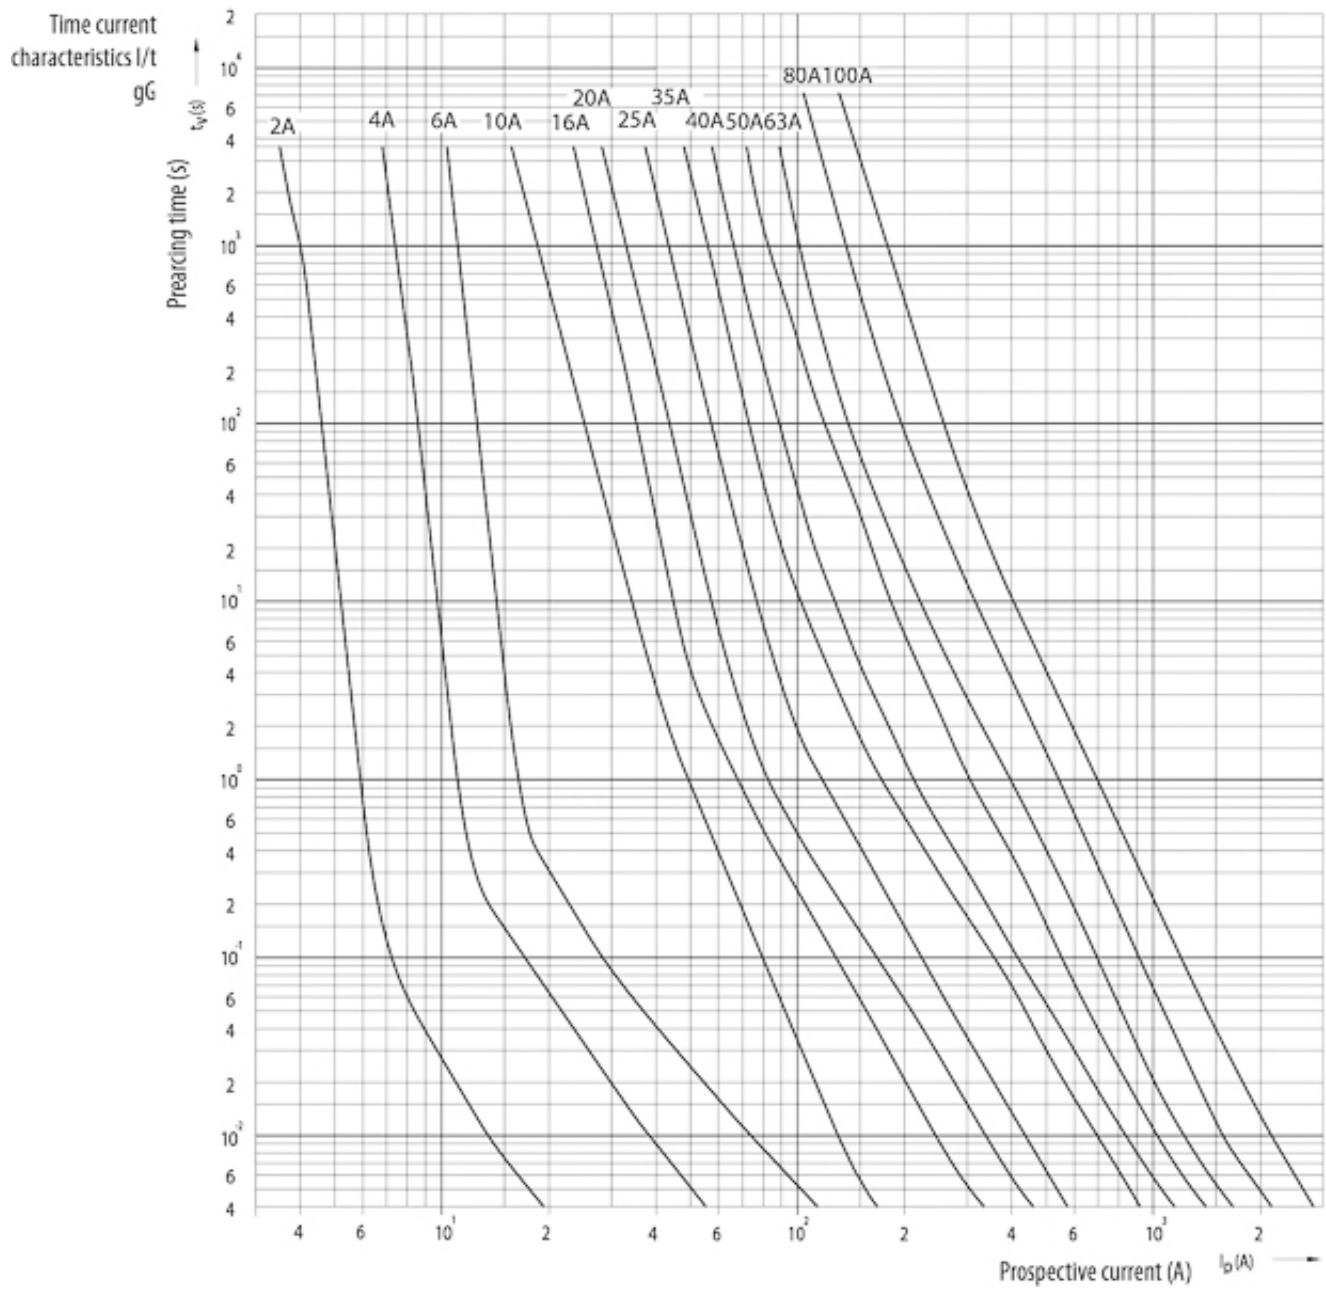

COM_ETISTORE_dimension

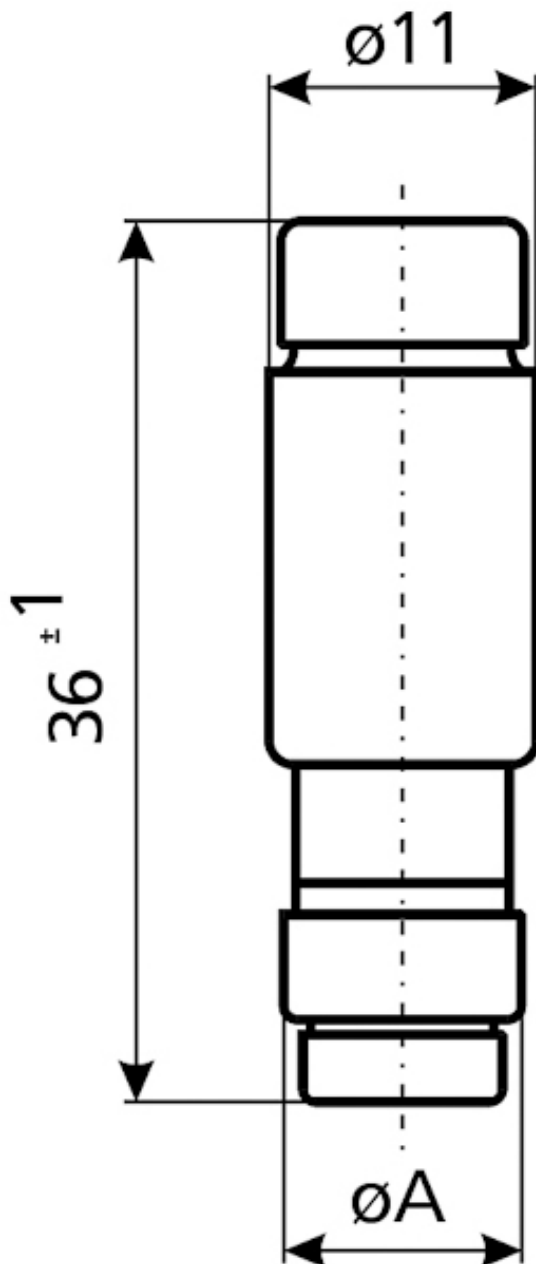

l_n [A]	$\text{Ø}A$
2	7,3
4	7,3
6	7,3
10	8,5
13	8,5
16	9,7